

Fulflo® Filter Bags

High-quality, consistent filtration performance

Fulflo® Filter Bags are ideal for virtually any process filtration application requiring the removal of solids. Parker's Fulflo® filter bags are manufactured and tested under the strictest quality control standards to assure consistent performance. Parker's Fulflo® filter bags perform at high flow rates and viscosities to 10,000 cps or higher.

Standard Fulflo® Filter Bags are available in 1µm to 800µm particle retention ratings.



Contact Information

Parker Hannifin Corporation
domnick hunter
Process Filtration - North America
2340 Eastman Avenue
Oxnard, California, USA 93030

toll free +1 877 784 2234
phone +1 805 604 3400
fax +1 805 604 3401
dhpsales.na@parker.com

www.parker.com/processfiltration

Features

- Standard filter bags fit Fulflo® vessels and most major competitive models
- The “C” Style Fulflo® bag features a polypropylene Quik-Seal ring which effectively seals the bag into standard Parker bag vessels
- The “G” Style Fulflo® bag features a carbon steel snap ring for positive sealing in competitive vessels
- Fulflo® Quik-Seal™ option is available for all “G” style Fulflo® filter bag media
- Felt bags come standard with glazed surface treatment to effectively control migration of fibers into the filtered product
- Polypropylene felt (P) bags are suitable for incidental food contact per CFR Title 21

Applications

- Solvents
- Bulk Chemicals
- Coatings
- Coolants
- Petroleum Oils
- Inks
- Paints
- Adhesives
- Resins
- Prefilters for Finer Cartridges
- Parts Washing Systems
- Water

Fulflo® Filter Bags

SPECIFICATIONS

Maximum Recommended Operating Conditions

Temperature:

Polyester: 275°F (136°C)

Polypropylene: 200°F (94°C)

Monofilament Nylon Mesh: 275°F (136°C)

Nomex®: 425°F (220°C)

Multifilament Polyester Mesh: 275°F (136°C)

Flow Rate: (Per single length)

Standard Bag: 80gpm (303 lpm)

Change-out ΔP: 35psi (2.4bar)

Pressure: 70psid (4.8bar)

Size

C1: 7.5" X 17.5"

C2: 7.5" X 31.5"

G1: 7" X 17.5"

G2: 7" X 31.5"

Effective Removal Ratings

0.5µm to 800µm

Bag Media Selection

Mono-filament Mesh:

Single strand nylon with retention ratings from 100µm to 600µm

Glazed Felt:

In polypropylene or polyester felts, the surface fibers are melt bonded to one another, reducing the possibility of fiber migration

Multi-filament Mesh:

Strong fabric woven from twisted strands. Particle retention ratings from 150µm to 800µm

High Temperature Nomex®

Standard Seal (no seal option specified)

C = Plastic Quik-Seal™ Ring
(polypropylene for P felt and polyester for PE felt)

G = Galvanized Steel Ring

Standard Bag Flow Factors

Rating (µm)	Flow Factors
1	0.00083
3	0.00059
5	0.00044
10	0.00029
25	0.00017
50	0.00013
75	0.00008
100	0.00007

Flow Rate and Pressure Drop Formulas

Flow Rate (gpm) = $\frac{\text{Clean } \Delta P \times \text{Length Factor}}{\text{Viscosity} \times \text{Flow Factor}}$



Clean ΔP = $\frac{\text{Flow Rate} \times \text{Viscosity} \times \text{Flow Factor}}{\text{Length Factor}}$

Notes:

1. Clean ΔP is psi differential at start.
2. Viscosity is centistokes. Use Conversion Tables for other units.
3. Flow Factor is ΔP/GPM at 1cks for single length bag.
4. Length Factors convert flow or ΔP from single length bags. Use length factor or 1 for single length and a factor of 2 for double length.



Ordering Information

Polypropylene, Polyester Felt Bags Note: C-Style Bags for Parker housings / G-Style Bags for Competitor housings

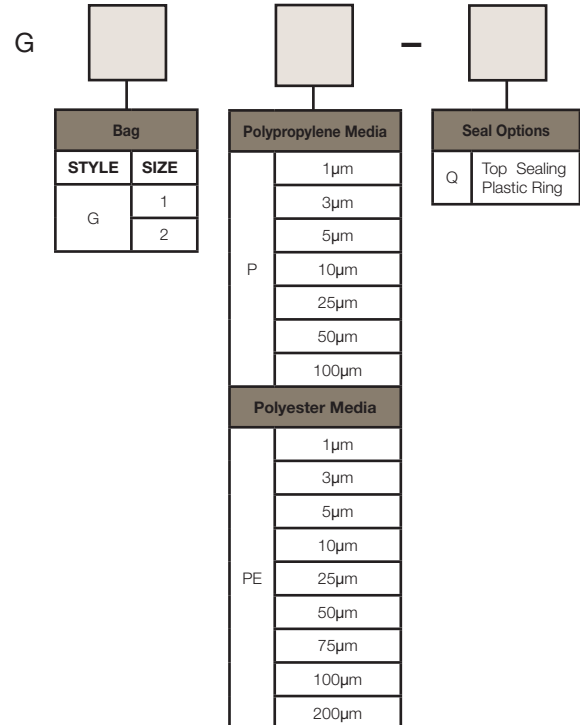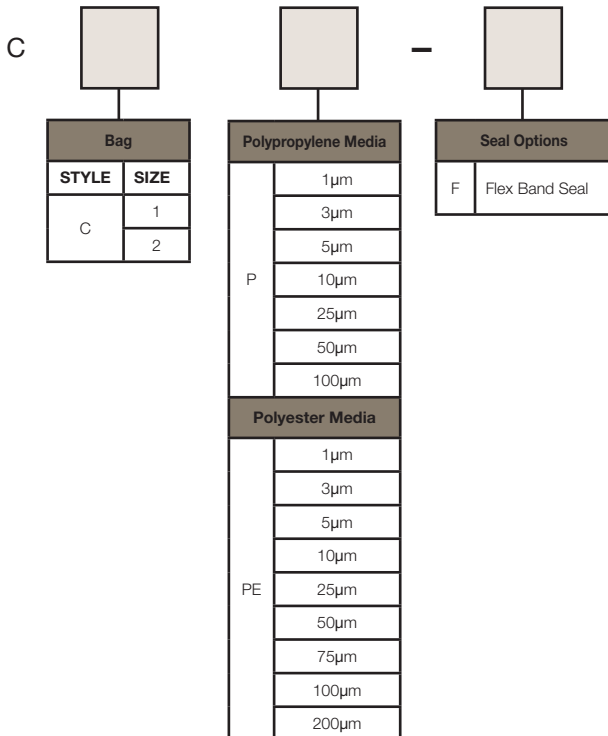



Polyester Multi-Filament Bags

Note: C-Style Bags for Parker housings / G-Style Bags for Competitor housings

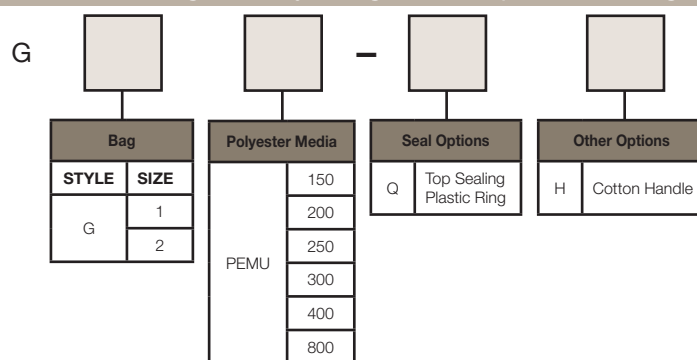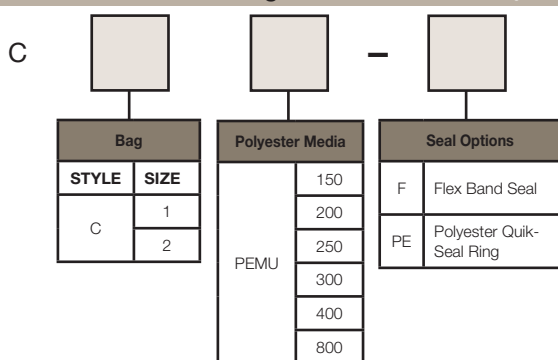

Nomex Felt Bags

Note: C-Style Bags for Parker housings / G-Style Bags for Competitor housings

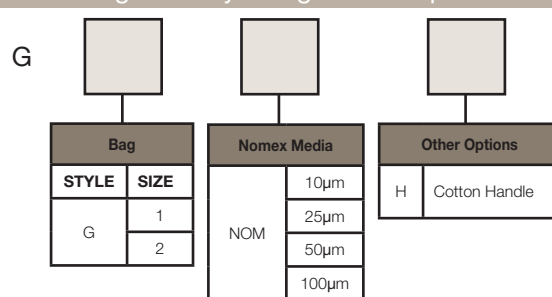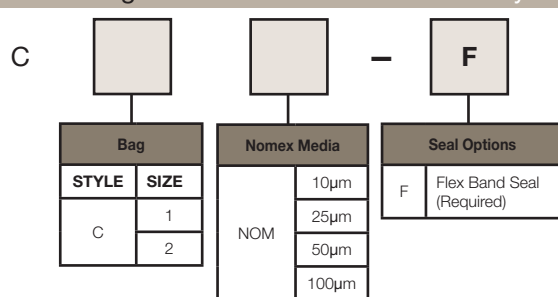

Nylon Mono-Filament Bags

Note: C-Style Bags for Parker housings / G-Style Bags for Competitor housings

