PHV Single and Multi Housings





- Atmospheric single and multi-round filter housings for filtration of tank air.
- Designed for the food and beverage industry.
- Available in 1, 3, 5 and 8 round.
- Easy handling with light bowl.

Applications

The PHV vent filter housing range is specifically designed for food and beverage applications that require filtration of tank air to atmosphere in:

- Beer
- Wine
- Bottled Water
- Dairy

Availability

The PHV vent filter housings are available as single and multi-round for 1, 3, 5 and 8 filter cartridges. The series will accept Parker's full range of C-Style (226) filter cartridges of nominal lengths 10", 20" and 30".

Materials

AISI 316L grade stainless steel is used for all wetted parts assuring corrosion resistance and durability.

Surface Finish

Internal and external surfaces are mechanically polished (<0.8 μ m Ra on the tank side).

Connections

The PHV vent filter range is available with Tri-Clamp, DIN 11851 liner or DIN 11851 male connections.

Certification

Each filter housing is supplied as standard with a manufacturer's report test certificate, declaration of conformity (where applicable) and user manual.

Directives

Parker filter housings are manufactured in accordance with European Directives: ATEX 2014/34/EU.

Technical Data

Materials (wetted surfaces): 316L Stainless Steel


Housing Closure: Vee-Clamp (Single) / Hand Wheels (Multi)

Number of Cartridges: 01, 03, 05 and 08
Cartridge Height: 10", 20" and 30"
Cartridge Location: C-Style (226)

Internal Surface: Mechanical Polish (Ra < 0.8 µm on tank side)

External Surface: Mechanical Polish

Ordering Information

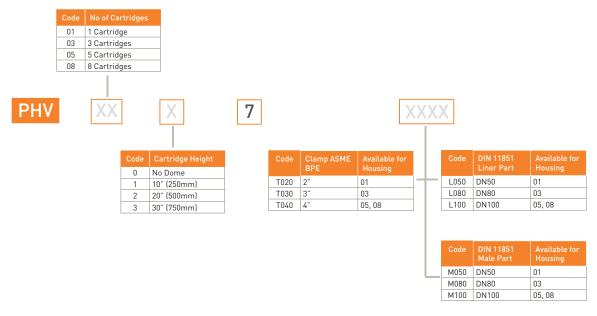

For further information refer to drawing 179502683

Further Documentation

- ► Material Certificates 3.1 (609500552)
- ▶ Weld Procedure Book (609500339)
- ▶ Weld Qualification Book (609500340)

Available at extra cost, to be requested at time of order.